



Rugged and compact solution for utility and towing assignments.


The versatile and easy to maneuver MT3 is built for towing and utility work. It is a four wheel drive powerhouse with an 8,000 to 10,000 pound (3,628 – 4,536 kilogram) drawbar rating. The MT3 will carry a load up to 2,500 pounds (1,133 kilograms).

The MT3 is currently available with a Kubota 3.6 liter Tier 3 diesel configuration for export, or with a National Security Exemption for US operations. It comes standard with four wheel wet mesh disc brakes for rugged, reliable, low maintenance operations.

Customized configurations for every application are available.



Photos and illustrations may show optional equipment.

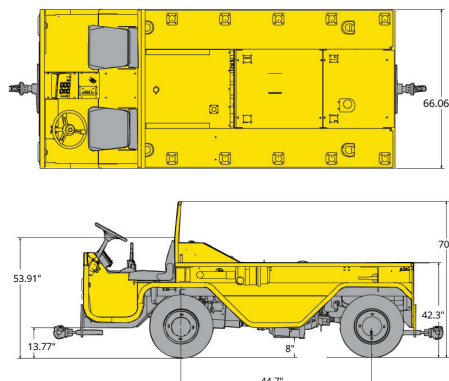

Features:

- ✓ 8,000 – 10,000 pound (3,628 – 4,536 kilogram) drawbar rating
- ✓ Tier 3 diesel (export or National Security Exemption only)
- ✓ Four wheel drive
- ✓ Factory new automatic transmission with separate transmission cooler
- ✓ Power assisted four wheel wet mesh brakes
- ✓ Front and rear suspension
- ✓ Heavy duty fixture welded steel frame
- ✓ Safety
 - Back up alarm
 - Horn
 - Anti-restart ignition switch
 - Engine safety shutdown (low oil pressure, high temperature)

MT3 Tow Tractor

	IMPERIAL	METRIC		IMPERIAL	METRIC
Drawbar pull capacity			Dimensions & data		
Model MT3-8K	8,000 lbs	3,628 kg	Height (without cab & with back guard)	70 in	178 cm
Model MT3-10K	10,000 lbs	4,535 kg	Height (with cab)	84.5 in	215 cm
Gross vehicle weight			Length	147.6 in	375 cm
Model MT3-8K	10,000 lbs	4,535 kg	Width	66 in	168 cm
Model MT3-10K	12,500 lbs	5,670 kg	Ground Clearance (less axle)	8 in	21 cm
			Speed (forward)	18 mph	29 km/h
			Speed (reverse)	5 mph	8 km/h

Drive System

Engine options

Diesel

- Kubota 3600 (Tier 3, export or National Security Exemption only)
- Jet A compatible

Cooling system

- Full size liquid cooled radiator, isolated from vibration

Transmission

- Factory new JCB PowerShift programmable four speed automatic transmission

Axles

- Front: JCB
- Rear: JCB

Tires

- Front: LT25/75R-16
- Rear: LT25/75R-16

Systems

Chassis

- Heavy duty fixture welded steel frame

Steering

- Power assisted

Braking

- Front:** Internal wet disc
- Rear:** Internal wet disc
- Parking:** Disc

Suspension

- Front:** Leaf spring with shock absorbers
- Rear:** Leaf spring with shock absorbers

Instrumentation

- Fuel level
- Oil pressure
- Coolant temperature
- Transmission oil temperature
- Voltmeter
- Engine hour meter

Lighting

- Headlights
- Taillights
- Brake
- Turn signals

Electrical

- 12V
- Dual maintenance free batteries
- 90 amp alternator with internal regulator

Configurations

Standard

- Adjustable operators seat with retractable seat belt
- Passenger seat with retractable seat belt
- Front and rear hitches
- 20 gallon (75 liter) fuel tank
- Back up alarm
- Anti-restart ignition switch
- Zinc rich primer and white or safety yellow polyurethane top coat

Optional

- Overhead guard
- Cab:**
 - All weather with heat and defrost
 - Air conditioning
- Econo
 - With or without heat and defrost
 - Canvas doors
 - Hitch view and/or back up camera with LCD dash monitor

Mirror kit(s):

- Left and right side mirrors
- Hitch mirror(s)
- Semi-suspension operators seat
- Operator seat safety presence switch
- LED amber beacon light
- Low gear lock in switch
- Speedometer
- Master disconnect switch
- License plate bracket
- Fire extinguisher(s)
- Tool and gear stowage lockers
- Cargo rails for rear deck
- Spare tire assemblies
- Heavy duty winterization package to -40F
- Snow plow attachment
- Custom paint color
- Consult factory for additional specialized configurations

Note: Specifications are subject to change without notice. Photos and illustrations may show optional equipment.